

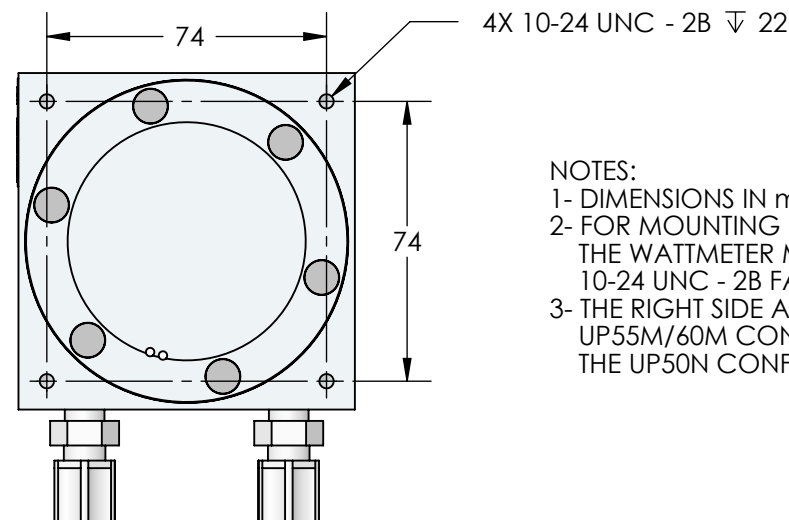
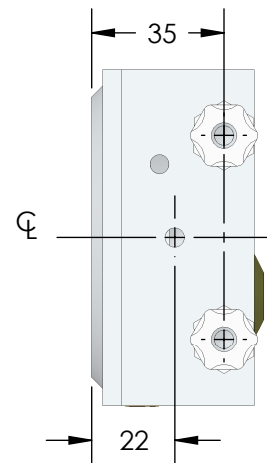
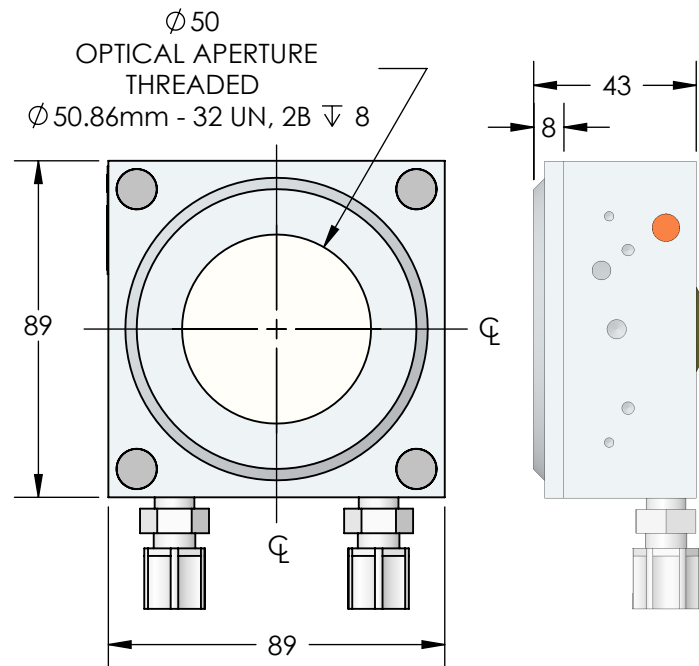
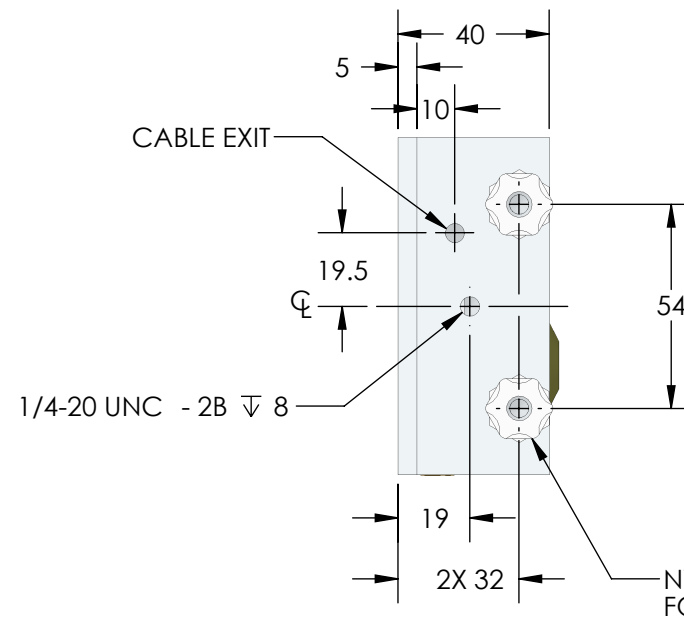


UP50M-50W-W9-DO/MT

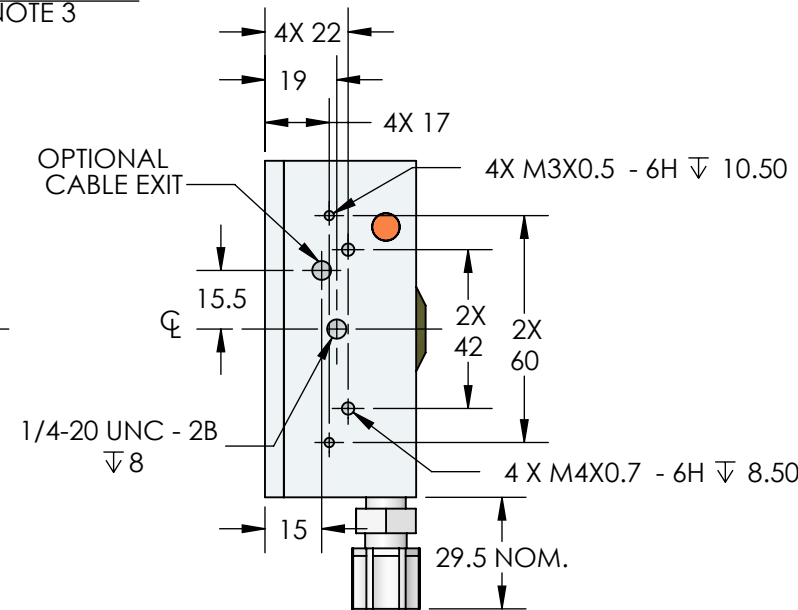


UP50/55/60M MOUNTING FROM FRONT WITHOUT COVER
SEE NOTE 2



UP55M-500W-H12-DO/MT
UP55M-700W-HD-DO
SEE NOTE 3

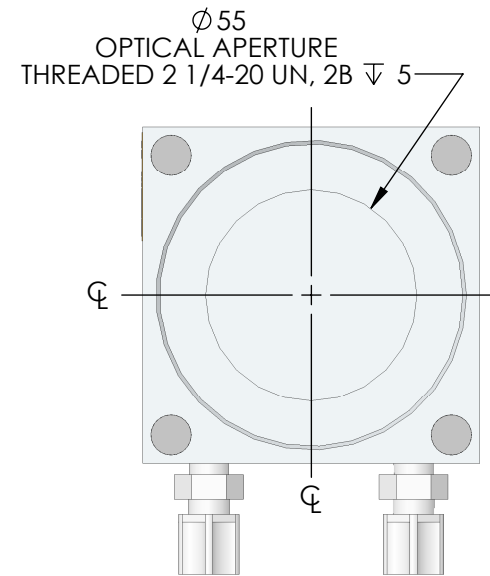

BOTTOM VIEW
FITTINGS REMOVED

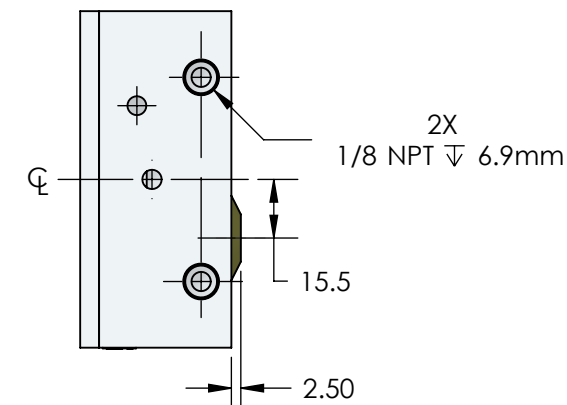


FRONT VIEW
UP60M-500W-HT2-DO
SEE NOTE 3

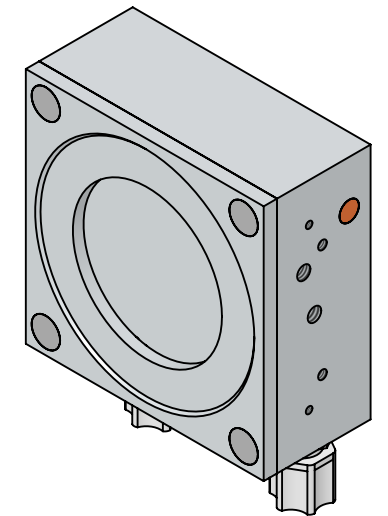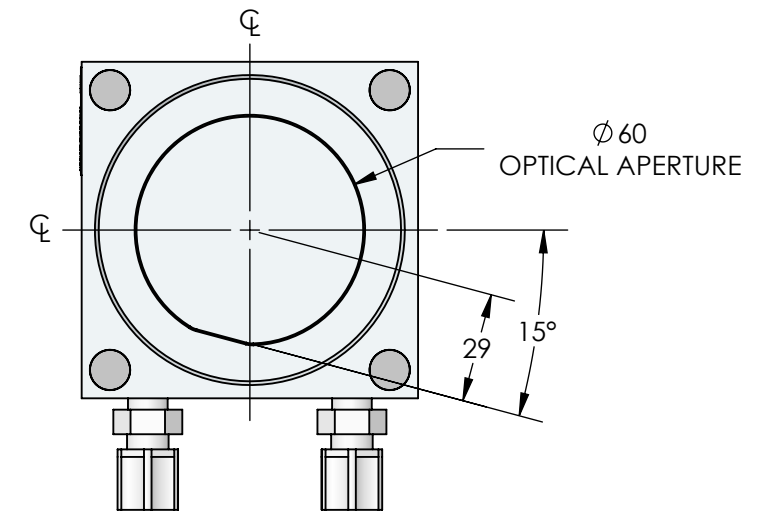

- NOTES:
- 1- DIMENSIONS IN mm
 - 2- FOR MOUNTING FROM THE FRONT WITHOUT A FRONT COVER THE WATTMETER MUST BE FASTENED FROM THE FRONT; USE FOUR 10-24 UNC - 2B FASTENERS.
 - 3- THE RIGHT SIDE AND BOTTOM VIEWS APPLY TO BOTH UP55M/60M CONFIGURATIONS. THE UP50N CONFIGURATION HAS A THICKER COVER.

IMPORTANT:
THIS DOCUMENT
IS PROPERTY OF
GENTEC ELECTRO-
OPTICS, IT CANNOT
BE DISTRIBUTED, USED
OR REPRODUCED IN
WHOLE OR IN PART
WITHOUT EXPRESS
WRITTEN AUTHORIZATION



A	UP55M-600W... RENAMED UP55M-700W...	13/06/06	RVH		
REF.	REVISION	DATE	VER	APP	
TOLERANCE					
DEC.	±				
FRAC.	±				
ANGLE	±				
APP.	VER.				
Ronald VH		LAYOUT DRAWING			
DATE 2011/02/14		UP50/55/60M			
1:2		SK-9096			
		A3			